


SIM SRS 200 Cardfeeder

SPECIFICATIONS

1 BLOCK = 1 SQUARE FOOT

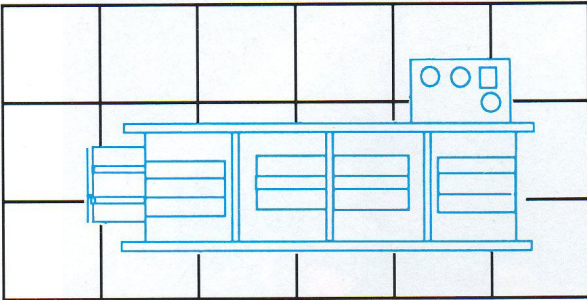

SPEED

Variable up to 350 cycles per minute.

FEEDER

Top loading, mini streamfeeder.
Dual vacuum drums.
Up to 12" pile height.

OPERATING MODES

"A" card continuous.
"B" card continuous.
Alternating "A"/"B" split.
"A" and "B" simultaneous.

CARD SIZE

Minimum 3-1/2 x 5"
Maximum 8 x 8"

CARD THICKNESS

2 page card stock or coated offset
.005" min. thickness

POROSITY

100cc of air thru 1.29
cu. cms orifice in .5 seconds

AIR REQUIRED

6 PSI (.42kg/cm²) continuous at 3 cfm
(.085 cu.m/min.)

VACUUM REQUIRED


20" Hg. through a 1/2" I.D. hose

ELECTRICAL


110 volts, single phase,
60 cycle is standard

POWER REQUIRED


1/4" H.P., driven from main line
shaft.

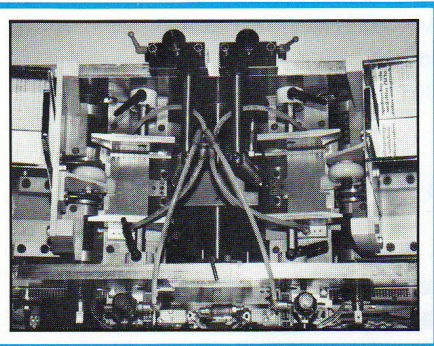

DUAL HOPPER ARRANGEMENT

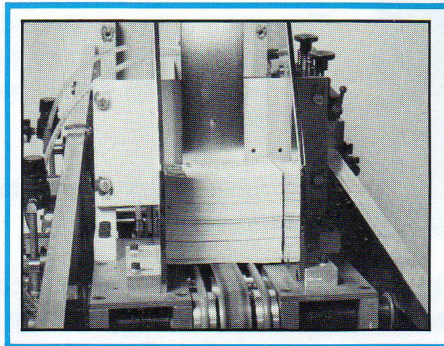

MINI STREAM FEEDER

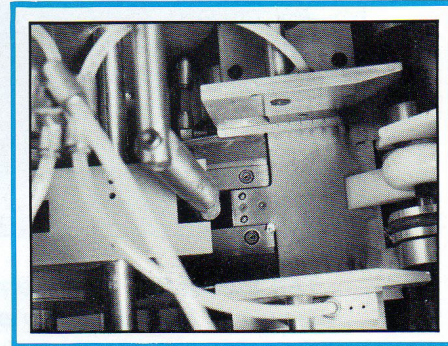

DUAL VACUUM DRUMS

sim+products

Custom Engineered Graphic Arts Systems

R.R. #1 • Box 58A • Shumway, Il 62461 • (217) 868-5431 • Tel Fax (217) 868-5446